




IG 8150

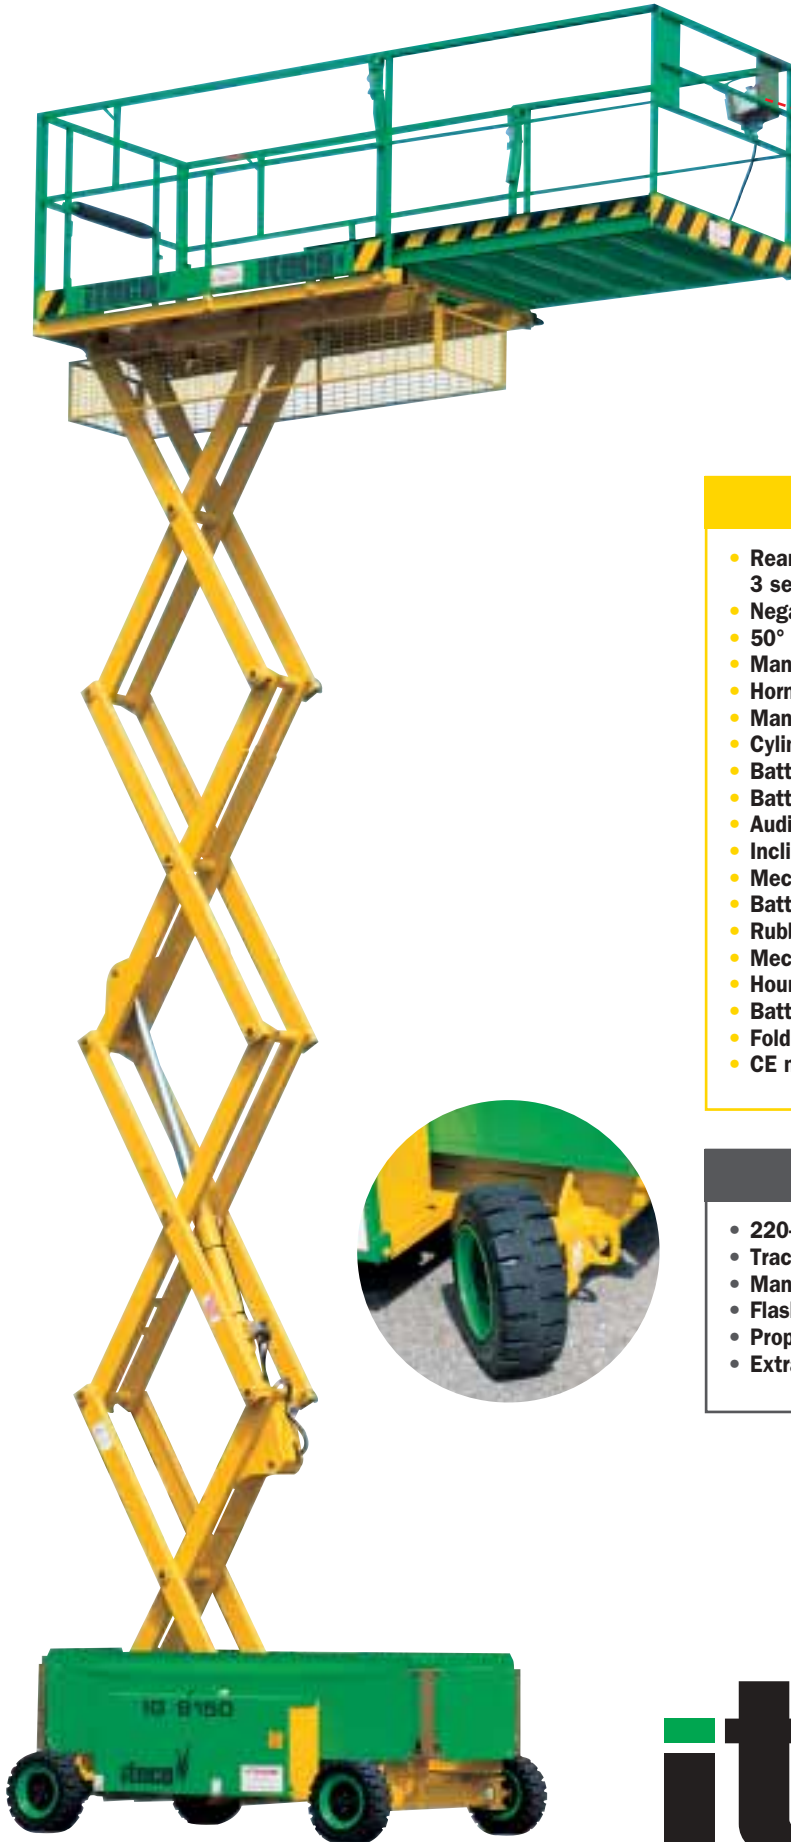

Standard equipment

- Rear hydraulic drive with electrical controls on platform. 3 selectable drive speeds.
- Negative parking brakes with hydraulic disengagement.
- 50° steering.
- Manual platform extension 0.90 m.
- Horn.
- Manual emergency lowering device.
- Cylinder holding valve.
- Battery 24 V – 240 Ah – (C5.)
- Battery charger with automatic switch-off 24 V – 40 A.
- Audible motion alarm.
- Inclinometer with motion blocking device and alarms.
- Mechanical wheel drive release for emergency hauling.
- Battery cut-out plug.
- Rubber non-marking tyres 16x6-8".
- Mechanical scissor protections.
- Hourmeter.
- Battery control system with low-voltage cut-out protection.
- Fold down railings.
- CE marking.

Options


- 220-V cable with plug, socket and safety cut-out.
- Traction battery 24 V – 320 Ah (C5.)
- Manual platform extension 1.50 m.
- Flashing beacon.
- Proportional controls with diagnostics.
- Extra-grip tyres filled with polyurethane foam 23x8.5-12".

iteco



Overall dimensions

IG 8150

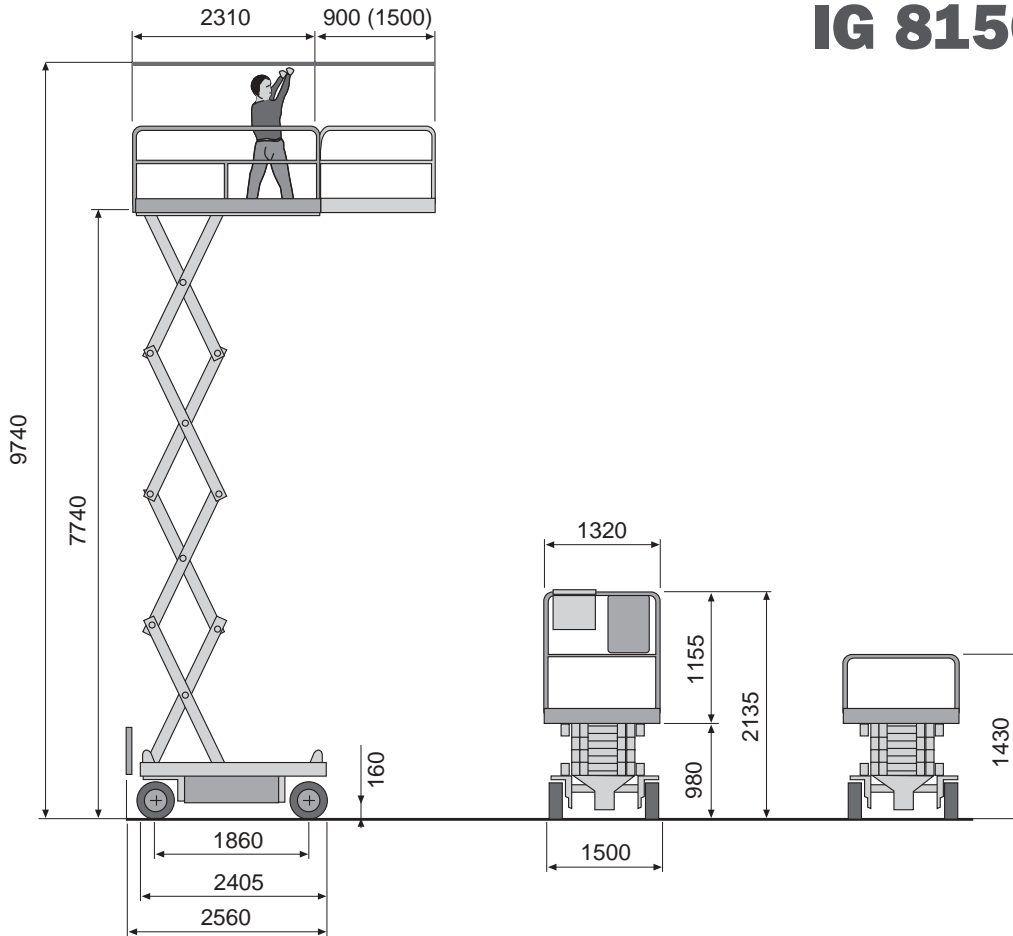

Technical specifications

Capacity	kg	465
Capacity on extension (m. 0.9) (m.1.5)	kg	265/165
Lift time (without load)	s	54
Lower time (wit load)	s	32
DC motor operation	V/kW	24/3
Battery voltage	V	24
Battery capacity	Ah	240 (C5)
Battery weight	kg	2x87
Battery charger	V/A	24/40
Max. hydraulic pressure	bar	195
Oil tank capacity	l	16
Traction speed (fast)	km/h	2,80
Traction speed (slow)	km/h	1,40
Traction speed (security)	km/h	1
Gradeability	%	17
Inside turning radius	m	1,40
Outside turning radius	m	3,50
Tyre dimensions	mm	410x164
Tyre type		16x6-8"
Total weight	kg	2020

Note: data, descriptions and illustrations are not binding for Iteco S.p.A. that reserves the right to make modifications to the production without prior notice thereof.

C060 - 0200 - 20 - 200

ITECO SPA
 46020 PEGOGNAGA (MN) ITALY
 Via S. Francesco D'Assisi, 8
 Tel. +39.0376.554011
 Fax +39.0376.559855
 E-mail: info@itecolift.it - www.itecolift.it

